

PLANTING AND IRRIGATION PLANS
FOR
MARKET PLACE
STORROWATER PONDRE VITILAZATION
PROJECT
MARKET PLACE
PENSACOLA, FLORIDA

OWNER
CITY OF PENSACOLA
RIGHT-OF-WAY

DECEMBER, 2020

M.C.W. PROJECT
NO. 20200024

DEVELOPER
LAURIE MURPHY
EXECUTIVE DIRECTOR &
COASTKEEPER
LAURIE@EMERALDCOASTKEEPER.ORG
P.O. BOX 13283
PENSACOLA, FL 32591

(850) 292-5960 MOBILE

LANDSCAPE ARCHITECT
M.C. WOLF CONSULTANTS
4539 OAK ORCHARD CIRCLE
PACE, FL. 32571
850-698-0056

SCALE: N.T.S.



VICINITY MAP

SURVEYOR
BASE PLAN TAKEN FROM
ESCAMBIA COUNTY PROPERTY
APPRAISER WEBSITE



4539 OAK ORCHARD CIRCLE
PACE, FL 32571
(850) 698-0056 (OFFICE)

NOTE TO CONTRACTOR: THIS DRAWING IS BASED ON
A RECENT AERIAL PHOTOGRAPH OBTAINED FROM
THE ESCAMBIA COUNTY PROPERTY APPRAISERS
OFFICE. ALL QUANTITIES SHOWN SHOULD BE FIELD
VERIFIED

STATE ONE CALL
1-800-432-4770



NEW SIDEWALK BY OTHERS

EXISTING LIGHT FIXTURES
AND POLES TO REMAIN
INSTALL APPROPRIATE
EROSION AND SEDIMENT
CONTROL MEASURES AT
EACH EXISTING
STORMWATER INLET

LIMB AND SHAPE EX CREPE
MYRTLES, 8 TOTAL

MARKET PLACE ROAD

PARCEL ID# 331S305101C00000

GRANDE DR.

N 12th Ave

STORMWATER POND
MAINTENANCE
ACCESS TO REMAIN

EX BILLBOARD
HEIGHT 30' +/-

EX CHAINLINK FENCE TO
REMAIN

EX TREES TO REMAIN

EX CONCRETE SIDEWALK
TO REMAIN

SACRED HEART

SUMMIT
BLVD.

BONEFISH
GRILL


PARCEL ID# 331S307101C001016

ANIMAL
HOSPITAL

ACCESS ROAD

N 12TH AVE.

NOTE TO CONTRACTOR: THIS DRAWING IS BASED ON
A RECENT AERIAL PHOTOGRAPH OBTAINED FROM
THE ESCAMBIA COUNTY PROPERTY APPRAISERS
OFFICE. ALL QUANTITIES SHOWN SHOULD BE FIELD
VERIFIED



STATE ONE CALL
1-800-432-4770

PARCEL ID# 331S305101000000

MARKET PLACE ROAD

UNITS OF CONSTRUCTION

STORMWATER POND
MAINTENANCE
ACCESS TO REMAIN

EX BILLBOARD
HEIGHT 30' +/-

EX TREES TO REMAIN

MEET EXISTING
SIDEWALK

N 12TH AVE.

SUMMIT
BLVD.

NOTE TO CONTRACTOR: THIS DRAWING IS BASED ON A RECENT AERIAL PHOTOGRAPH OBTAINED FROM THE ESCAMBIA COUNTY PROPERTY APPRAISERS OFFICE. ALL QUANTITIES SHOWN SHOULD BE FIELD VERIFIED

NO.	DESCRIPTION	QUANTITY	UNIT	AMOUNT
1	ASPH/FLY	100	SQ YD	100
2	CONCRETE	50	SQ YD	50
3	PAVING	200	SQ YD	200
4	LANDSCAPING	100	SQ YD	100
5	PLANTING	50	SQ YD	50
6	GRASS	100	SQ YD	100
7	SOIL	100	SQ YD	100
8	ROCK	100	SQ YD	100
9	PAINT	100	SQ YD	100
10	IRONING	100	SQ YD	100
11	CONCRETE	100	SQ YD	100
12	PAVING	100	SQ YD	100
13	LANDSCAPING	100	SQ YD	100
14	PLANTING	100	SQ YD	100
15	GRASS	100	SQ YD	100
16	SOIL	100	SQ YD	100
17	ROCK	100	SQ YD	100
18	PAINT	100	SQ YD	100
19	IRONING	100	SQ YD	100
20	CONCRETE	100	SQ YD	100
21	PAVING	100	SQ YD	100
22	LANDSCAPING	100	SQ YD	100
23	PLANTING	100	SQ YD	100
24	GRASS	100	SQ YD	100
25	SOIL	100	SQ YD	100
26	ROCK	100	SQ YD	100
27	PAINT	100	SQ YD	100
28	IRONING	100	SQ YD	100
29	CONCRETE	100	SQ YD	100
30	PAVING	100	SQ YD	100
31	LANDSCAPING	100	SQ YD	100
32	PLANTING	100	SQ YD	100
33	GRASS	100	SQ YD	100
34	SOIL	100	SQ YD	100
35	ROCK	100	SQ YD	100
36	PAINT	100	SQ YD	100
37	IRONING	100	SQ YD	100
38	CONCRETE	100	SQ YD	100
39	PAVING	100	SQ YD	100
40	LANDSCAPING	100	SQ YD	100
41	PLANTING	100	SQ YD	100
42	GRASS	100	SQ YD	100
43	SOIL	100	SQ YD	100
44	ROCK	100	SQ YD	100
45	PAINT	100	SQ YD	100
46	IRONING	100	SQ YD	100
47	CONCRETE	100	SQ YD	100
48	PAVING	100	SQ YD	100
49	LANDSCAPING	100	SQ YD	100
50	PLANTING	100	SQ YD	100
51	GRASS	100	SQ YD	100
52	SOIL	100	SQ YD	100
53	ROCK	100	SQ YD	100
54	PAINT	100	SQ YD	100
55	IRONING	100	SQ YD	100
56	CONCRETE	100	SQ YD	100
57	PAVING	100	SQ YD	100
58	LANDSCAPING	100	SQ YD	100
59	PLANTING	100	SQ YD	100
60	GRASS	100	SQ YD	100
61	SOIL	100	SQ YD	100
62	ROCK	100	SQ YD	100
63	PAINT	100	SQ YD	100
64	IRONING	100	SQ YD	100
65	CONCRETE	100	SQ YD	100
66	PAVING	100	SQ YD	100
67	LANDSCAPING	100	SQ YD	100
68	PLANTING	100	SQ YD	100
69	GRASS	100	SQ YD	100
70	SOIL	100	SQ YD	100
71	ROCK	100	SQ YD	100
72	PAINT	100	SQ YD	100
73	IRONING	100	SQ YD	100
74	CONCRETE	100	SQ YD	100
75	PAVING	100	SQ YD	100
76	LANDSCAPING	100	SQ YD	100
77	PLANTING	100	SQ YD	100
78	GRASS	100	SQ YD	100
79	SOIL	100	SQ YD	100
80	ROCK	100	SQ YD	100
81	PAINT	100	SQ YD	100
82	IRONING	100	SQ YD	100
83	CONCRETE	100	SQ YD	100
84	PAVING	100	SQ YD	100
85	LANDSCAPING	100	SQ YD	100
86	PLANTING	100	SQ YD	100
87	GRASS	100	SQ YD	100
88	SOIL	100	SQ YD	100
89	ROCK	100	SQ YD	100
90	PAINT	100	SQ YD	100
91	IRONING	100	SQ YD	100
92	CONCRETE	100	SQ YD	100
93	PAVING	100	SQ YD	100
94	LANDSCAPING	100	SQ YD	100
95	PLANTING	100	SQ YD	100
96	GRASS	100	SQ YD	100
97	SOIL	100	SQ YD	100
98	ROCK	100	SQ YD	100
99	PAINT	100	SQ YD	100
100	IRONING	100	SQ YD	100

STATE ONE CALL
1-800-432-4770

ASSUMED NORTH

PARCEL ID# 331S305101000000

MARKET PLACE ROAD

UNITS OF CONSTRUCTION

STORMWATER POND
MAINTENANCE
ACCESS TO REMAIN

EX BILLBOARD
HEIGHT 30' +/-



EX TREES TO REMAIN

MEET EXISTING
SIDEWALK

N 12TH AVE.

SUMMIT
BLVD.

NOTE TO CONTRACTOR: THIS DRAWING IS BASED ON A RECENT AERIAL PHOTOGRAPH OBTAINED FROM THE ESCAMBIA COUNTY PROPERTY APPRAISERS OFFICE. ALL QUANTITIES SHOWN SHOULD BE FIELD VERIFIED

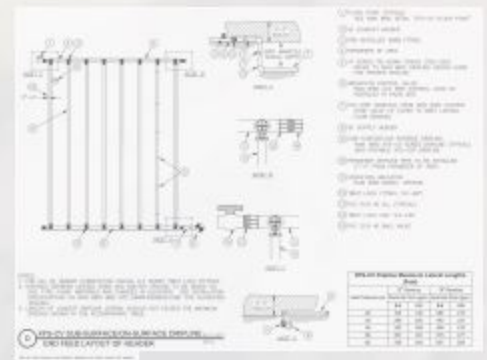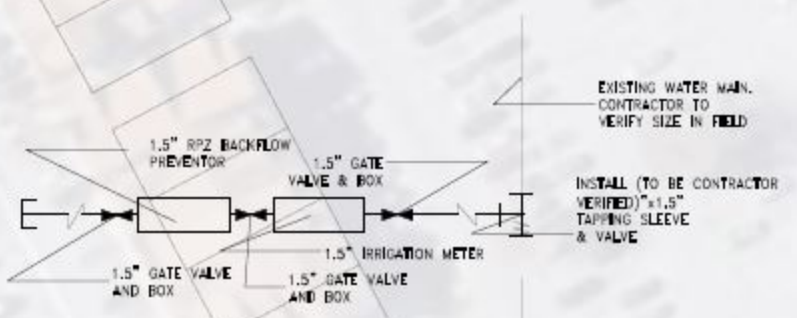

REQUIREMENTS FOR SILT FENCE AND SEDIMENT CONTROL

1. ALL SILT FENCES AND SEDIMENT CONTROL STRUCTURES TO BE INSTALLED MUST BE CONSTRUCTED TO THE FOLLOWING STANDARDS:
 - A. SILT FENCES SHALL BE CONSTRUCTED TO THE FOLLOWING STANDARDS:
 - 1. SILT FENCES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - 2. SILT FENCES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - 3. SILT FENCES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - 4. SILT FENCES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - 5. SILT FENCES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - B. SEDIMENT CONTROL STRUCTURES SHALL BE CONSTRUCTED TO THE FOLLOWING STANDARDS:
 - 1. SEDIMENT CONTROL STRUCTURES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - 2. SEDIMENT CONTROL STRUCTURES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - 3. SEDIMENT CONTROL STRUCTURES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - 4. SEDIMENT CONTROL STRUCTURES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - 5. SEDIMENT CONTROL STRUCTURES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.

REQUIREMENTS FOR TREE BARRICADE

1. TREE BARRICADES SHALL BE CONSTRUCTED TO THE FOLLOWING STANDARDS:
 - A. TREE BARRICADES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - B. TREE BARRICADES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.

REQUIREMENTS FOR BALES BACKED BY FENCE

1. BALES BACKED BY FENCE SHALL BE CONSTRUCTED TO THE FOLLOWING STANDARDS:
 - A. BALES BACKED BY FENCE SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - B. BALES BACKED BY FENCE SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.

REQUIREMENTS FOR STABILIZED CONSTRUCTION ENTRANCE

1. STABILIZED CONSTRUCTION ENTRANCES SHALL BE CONSTRUCTED TO THE FOLLOWING STANDARDS:
 - A. STABILIZED CONSTRUCTION ENTRANCES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - B. STABILIZED CONSTRUCTION ENTRANCES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.

REQUIREMENTS FOR TRENCH DEWATERING OPERATIONS

1. TRENCH DEWATERING OPERATIONS SHALL BE CONSTRUCTED TO THE FOLLOWING STANDARDS:
 - A. TRENCH DEWATERING OPERATIONS SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - B. TRENCH DEWATERING OPERATIONS SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.

REQUIREMENTS FOR PROTECTION AROUND INLETS

1. PROTECTION AROUND INLETS SHALL BE CONSTRUCTED TO THE FOLLOWING STANDARDS:
 - A. PROTECTION AROUND INLETS SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - B. PROTECTION AROUND INLETS SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.

REQUIREMENTS FOR MATERIAL STOCKPILE

1. MATERIAL STOCKPILES SHALL BE CONSTRUCTED TO THE FOLLOWING STANDARDS:
 - A. MATERIAL STOCKPILES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - B. MATERIAL STOCKPILES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.

REQUIREMENTS FOR BARRIERS FOR UNPAVED DITCHES

1. BARRIERS FOR UNPAVED DITCHES SHALL BE CONSTRUCTED TO THE FOLLOWING STANDARDS:
 - A. BARRIERS FOR UNPAVED DITCHES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - B. BARRIERS FOR UNPAVED DITCHES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.

REQUIREMENTS FOR BARRIERS FOR PAVED DITCHES

1. BARRIERS FOR PAVED DITCHES SHALL BE CONSTRUCTED TO THE FOLLOWING STANDARDS:
 - A. BARRIERS FOR PAVED DITCHES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - B. BARRIERS FOR PAVED DITCHES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.




REQUIREMENTS FOR FILTER BAG DETAIL

1. FILTER BAG DETAILS SHALL BE CONSTRUCTED TO THE FOLLOWING STANDARDS:
 - A. FILTER BAG DETAILS SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - B. FILTER BAG DETAILS SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.

NOTE TO CONTRACTOR: THIS DRAWING IS BASED ON A RECENT AERIAL PHOTOGRAPH OBTAINED FROM THE ESCAMBIA COUNTY PROPERTY APPRAISERS OFFICE. ALL QUANTITIES SHOWN SHOULD BE FIELD VERIFIED.

REQUIREMENTS FOR SILT FENCE AND SEDIMENT CONTROL






1. INSTALLATION OF ALL SEDIMENT AND EROSION CONTROL DEVICES THAT CAN BE PLACED PERMANENTLY TO ANY SLOPE SHALL BE INSTALLED TO THE FOLLOWING STANDARDS:
 - A. SEDIMENT AND EROSION CONTROL DEVICES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - B. SEDIMENT AND EROSION CONTROL DEVICES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.

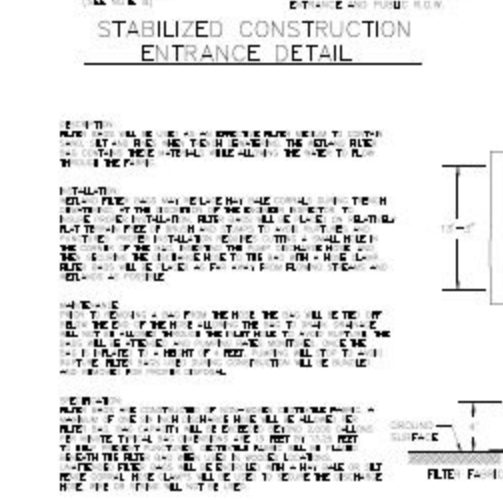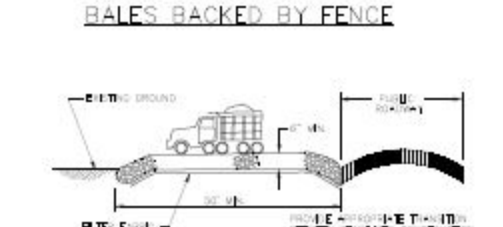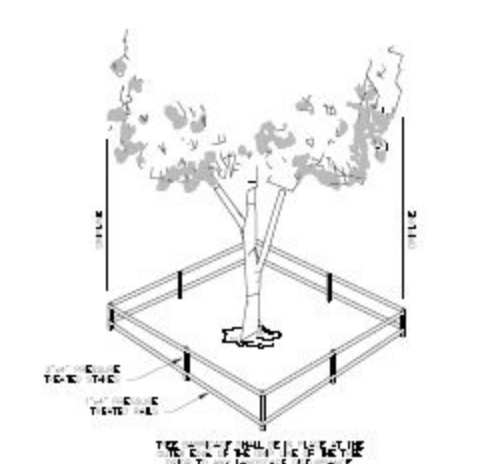

STATE ONE CALL 1-800-432-4770

REQUIREMENTS FOR SILT FENCE AND SEDIMENT CONTROL



1. INSTALLATION OF ALL SEDIMENT AND EROSION CONTROL DEVICES THAT CAN BE PLACED PERMANENTLY TO ANY SLOPE SHALL BE INSTALLED TO THE FOLLOWING STANDARDS:
 - A. SEDIMENT AND EROSION CONTROL DEVICES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - B. SEDIMENT AND EROSION CONTROL DEVICES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.

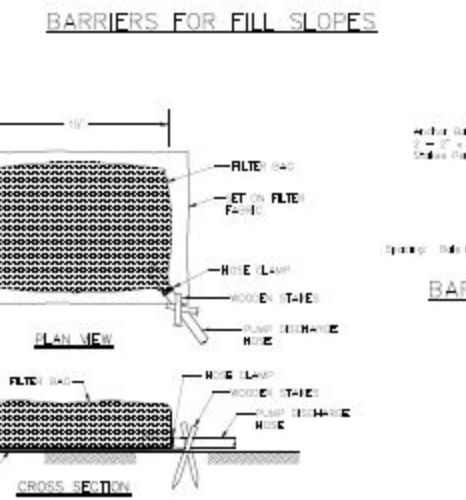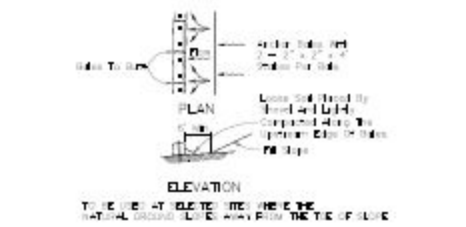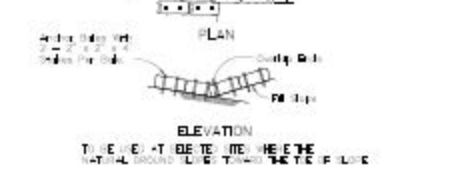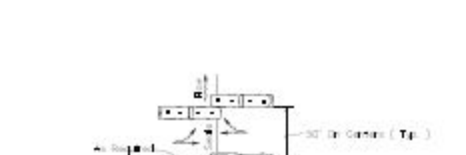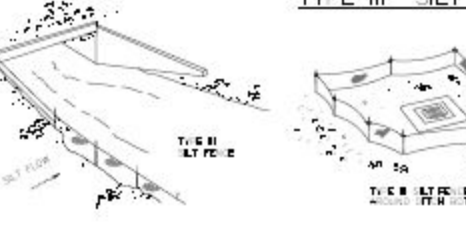

STATE ONE CALL 1-800-432-4770

REQUIREMENTS FOR SILT FENCE AND SEDIMENT CONTROL


1. INSTALLATION OF ALL SEDIMENT AND EROSION CONTROL DEVICES THAT CAN BE PLACED PERMANENTLY TO ANY SLOPE SHALL BE INSTALLED TO THE FOLLOWING STANDARDS:
 - A. SEDIMENT AND EROSION CONTROL DEVICES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - B. SEDIMENT AND EROSION CONTROL DEVICES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.

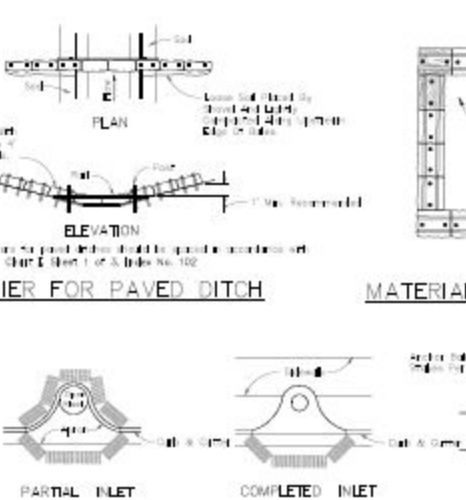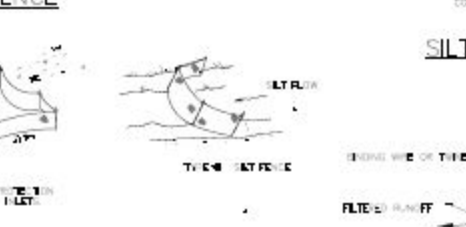

STATE ONE CALL 1-800-432-4770

REQUIREMENTS FOR SILT FENCE AND SEDIMENT CONTROL

1. INSTALLATION OF ALL SEDIMENT AND EROSION CONTROL DEVICES THAT CAN BE PLACED PERMANENTLY TO ANY SLOPE SHALL BE INSTALLED TO THE FOLLOWING STANDARDS:
 - A. SEDIMENT AND EROSION CONTROL DEVICES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.
 - B. SEDIMENT AND EROSION CONTROL DEVICES SHALL BE CONSTRUCTED WITH A MINIMUM OF 100 LBS OF COMPACTED SOIL PER LINEAL FOOT OF FENCE.



STATE ONE CALL 1-800-432-4770

