



- Notes:
1. The improvements to Wright Street will provide access between the Global Learning Academy and Pace Boulevard and a signal at the intersection of Wright Street and Pace Boulevard.
  2. The Wright Street corridor improvements are intended to implement revitalization efforts within the Westside CRA.


3. The Wright Street TAP improvements include an ADA accessible sidewalk on the both sides of the right-of-way, striping new P Street crosswalk, relocating existing crosswalk, street trees, street lighting, and wayfinding signage.
4. Wright Street is Segment 3 of the TAP application. L Street is Segment 1. Gregory Street is Segment 2.



The existing typical section and proposed typical section dimensions are identical. The only additions are sidewalks, street trees, and lighting. No change is proposed for the right-of-way or travel lane widths.

Notes:

1. Wright Street has a 70-foot right-of-way with two 12-foot travel lanes. The street includes a small non-standard sidewalk on the north side with no sidewalk on the south side. The project proposes to remove the narrow north sidewalk and construct a 5-foot sidewalk on both sides of the right-of-way.
2. Parking on the street should not be allowed since this street is an access to the bus ramp at the Global Learning Center.
3. Large driveways exist in the north side. The sidewalk should be placed within 1 foot of the right-of-way.
4. Street lights will be placed near the road edge on each side.

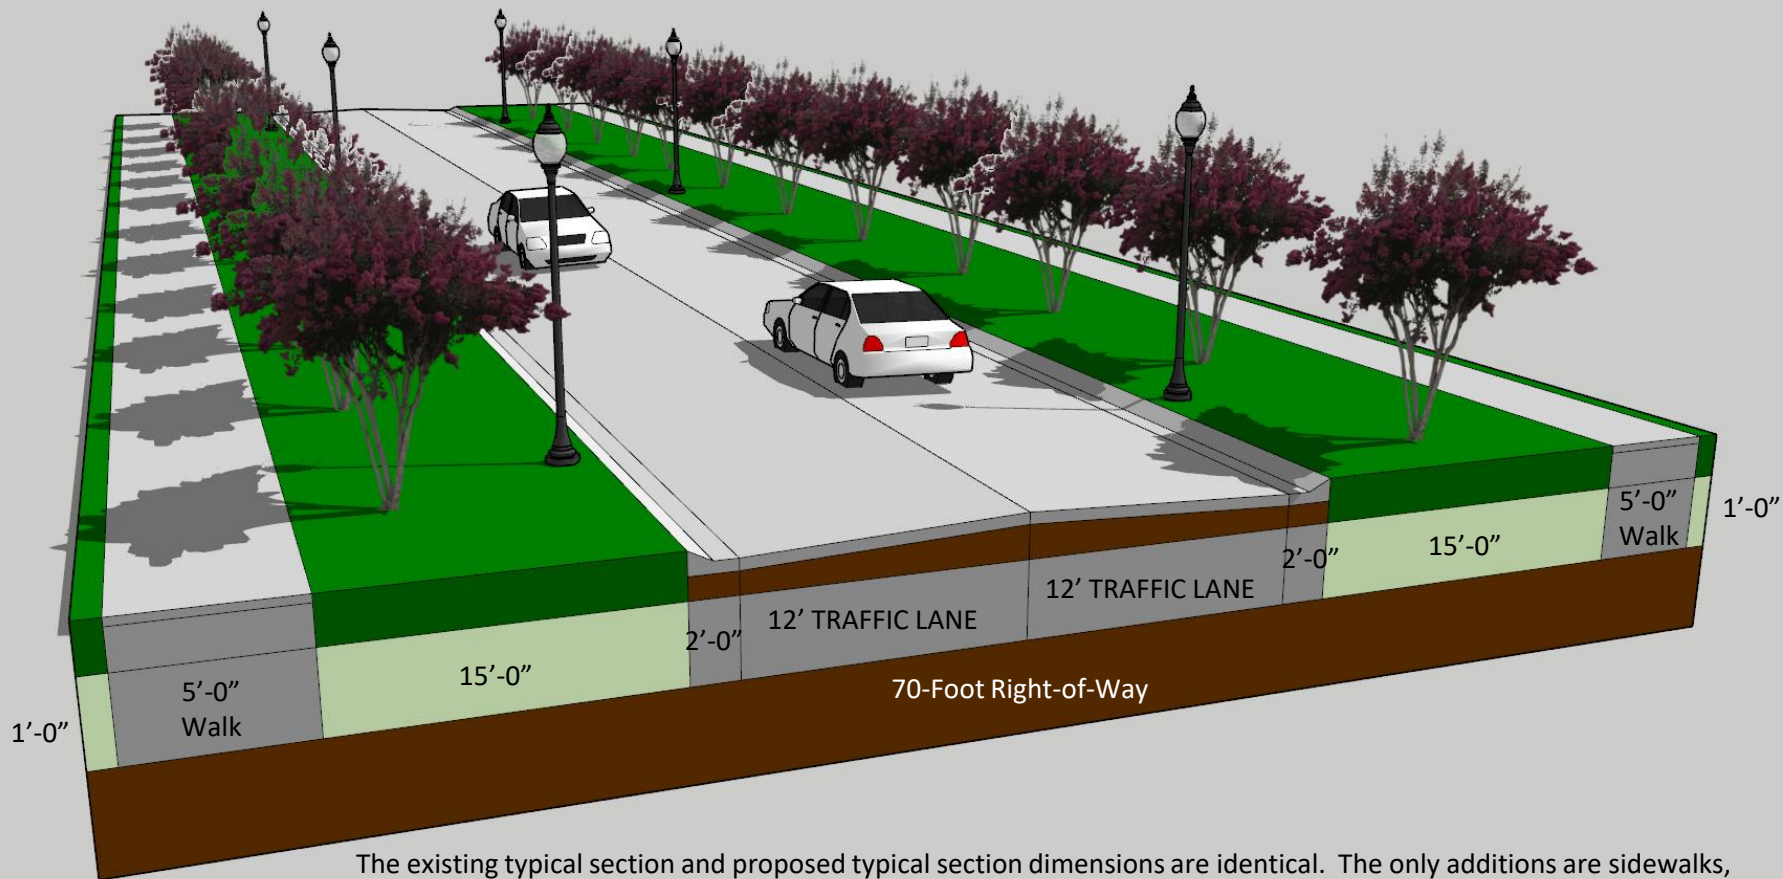

The existing typical section and proposed typical section dimensions are identical. The only additions are sidewalks, street trees, and lighting. No change is proposed for the right-of-way or travel lane widths.

Notes:

1. Wright Street has a 70-foot right-of-way with two 12-foot travel lanes. The street includes a small non-standard sidewalk on the north side with no sidewalk on the south side. The project proposes to remove the narrow north sidewalk and construct a 5-foot sidewalk on both sides of the right-of-way.
2. Parking on the street should not be allowed since this street is an access to the bus ramp at the Global Learning Center.
3. Large driveways exist in the north side. The sidewalk should be placed within 1 foot of the right-of-way.
4. Street lights will be placed near the road edge on each side.